



Polishing Anodizing Painting Custom Aluminum Cnc Machining Precision For Budget Constraints

Our Product Introduction

Basic Information

- Place of Origin: China Shenzhen
- Brand Name: CNC Precision Machining
- Certification: Polishing, Anodizing, Painting, Chrome Plating, Silkscreen
- Model Number: Aluminum, SS, SGCC, Copper, MS
- Minimum Order Quantity: 1 piece
- Price: USD 30/piece
- Packaging Details: Carton, Plywood Box
- Delivery Time: 3 - 5 Days
- Payment Terms: T/T, Paypal
- Supply Ability: 1 piece/day



Product Specification

- Material: Aluminum 6082, Aluminum 7075, Aluminum 6063, Aluminum 6061, Copper, Brass, SS304
- Tolerance: $\pm 0.1\text{mm}$, ± 0.02 , ± 0.05 ,
- Surface Finish: Debur, Polishing, Anodizing, Painting, Chrome Plating, Silkscreen, Laser Etching
- Courier: DHL, FedEx, UPS
- Shipping: Express Or Air Freight
- Usage: Medical Device, Aerospace Prototype, Automotive Rapid Prototyping
- Machining Type: CNC Precision Machining
- Processing Time: 3-5 Days
- Highlight: **Polishing custom aluminum cnc machining, Painting custom aluminum cnc machining, Precision custom cnc aluminum parts**



Product Description

Understanding CNC Machining

CNC machining stands for Computer Numerical Control machining, a method where computer-controlled machine tools precisely remove material from a workpiece. This computerized control results in faster, more precise, and accurate machining compared to conventional methods.



At Baranar Rapid, we utilize advanced equipment to provide a wide range of CNC machining services, including milling, turning, EDM, wire EDM, surface grinding, and more. Our imported 3, 4, and 5-axis CNC machining centers, operated by skilled machinists, can produce turned and milled parts using various plastic and metal materials. Additionally, our robust supply chain allows us to scale according to project requirements.

CNC Machining + Assembly Check



Tolerances

Our CNC machining tolerances adhere to DIN-2768-1-fine for metals and DIN-2768-1-medium for plastics. Tolerance levels may vary depending on part geometry and material type. Our project managers work closely with clients to ensure the highest precision possible for each project.

Materials for CNC Turning Parts			
Our CNC turning capabilities are suited for a diverse array of materials, encompassing both machine-grade metals and plastics. Tailored to your specific needs, we can produce accurate rapid prototypes and low-volume production runs using a variety of high-quality materials. Explore the common materials available for your CNC turning endeavors.			
	ALuminum Aluminum is a highly ductile metal, making it easy to machining. The material has a good strength-to-weight ratio and is available in many types for a range of applications.		ALuminum
		Machinable Material Types	AL 6061, AL6063,AL6082,AL7075
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Copper Copper displays excellent thermal conductivity, electrical conductivity and plasticity. It is also highly ductile, corrosion resistant and can be easily welded.		Copper
		Wall Thickness	0.75 mm
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Brass Brass has desirable properties for a number of applications. It is low friction, has excellent		Brass
		Wall Thickness	0.75 mm
		Lead Time	3 days

	electrical conductivity and has a golden (brass) appearance.	Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Stainless Steel Stainless steel is the low carbon steel that offers many properties that are sought after for industrial applications. Stainless steel typically contains a minimum of 10% chromium by weight.		Stainless Steel
		Wall Thickness	0.75 mm
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Titanium Titanium has a number of material properties that make it the ideal metal for demanding applications. These properties include excellent resistance to corrosion, chemicals and extreme temperatures. The metal also has an excellent strength-to-weight ratio.		Titanium
		Wall Thickness	0.75 mm
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Plastics Plastics are also a very popular option for CNC machining because of its wide choices, relatively lower price, and significantly faster machining time needed. We provide all common plastics for CNC machining services.		Plastics
		Machinable Material Types	ABS,PC,PMMA,PTFE,PVDF,POM,PA
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm
	Magnesium Magnesium is a silver-white metal with a density of 1.74 g/cm3. Its characteristics are small density, good ductility, high strength, large elastic modulus, good heat dissipation, good shock absorption, greater impact load capacity than aluminum alloy, and good corrosion resistance to organic substances and alkalis.		Magnesium
		Wall Thickness	0.75 mm
		Lead Time	3 days
		Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm

Applications of CNC Machining

Our precision CNC machining services are utilized to produce complex parts, components, and tools for plastic injection molding and pressure die casting. Moreover, CNC manufacturing serves secondary operations like drilling, tapping, and milling on previously machined parts or components from other processes. Among CNC machine tools, CNC mills stand out as the most prevalent and adaptable multi-axis machines in our daily operations at Barana Rapid.

CNC Machining + Assembly Check



Common Metal Materials for CNC Machining

Aluminum 6061: Commonly used for various applications such as auto parts, bicycle frames, sporting goods, aircraft components, and RC vehicle frames.

Aluminum 7075: Known for its strength, often used in high-stress applications like aerospace, automotive, and recreational equipment.

Brass: Versatile alloy used in plumbing fittings, decorative hardware, naval hardware, musical instruments, and more.

Magnesium AZ31: Lightweight alloy favored for aircraft components, power tools, laptop cases, and camera bodies.

Stainless Steel 303, 304, 316: Stainless steels with varying properties suitable for nuts, bolts, fittings, shafts, gears, kitchen accessories, architectural elements, and marine applications.

Carbon Steel 1045: Materials commonly utilized in industrial applications for nuts, bolts, gears, shafts, connecting rods, and mechanical parts that require strength include 1045 steel, also known as C45 in the European standard.

Titanium: High-strength, lightweight material utilized in aerospace, military, biomedical, and industrial applications.

Common Plastic Materials for CNC Machining

Plastic resins used for CNC milling and turning must be rigid enough to hold their shape while clamped. The following types of plastic resin have proven themselves over the years:

ABS

Tough, impact-resistant, and resistant to chemicals and electrical current, ABS is commonly used in automotive components, power tools, toys, and sporting goods.

Nylon

With greater tensile strength, Nylon is used for fabric, rope, and mechanical parts, often mixed with ABS resins for enhanced properties.

PMMA Acrylic

Rigid and transparent, PMMA is used for clear optical parts, display screens, light pipes, lenses, enclosures, and food storage.

PEEK

A high-strength and stable engineering plastic, PEEK is used for advanced medical, aerospace, and electronic components, known for its resistance to high temperatures.

UHMWPE

Ultra high molecular weight polyethylene, known for its hardness, strength, chemical resistance, and slippery surface, is commonly used in joint replacements, marine environments, and gear trains.

Materials for Custom CNC Machining Parts

A wide range of materials is available for CNC machines, offering versatility for rapid prototyping and custom production of intricate parts. We offer instant quotes for over 150 metals and plastics to meet your manufacturing requirements, allowing you to compare costs across various processed materials.

		Aluminum	
		Machinable Material Types	AL6061-T6,AL6063-T6,AL6082
			AL7075-T6,AL5052-H32
		Lead Time	3 days



range of applications.

Tolerances	±0.01mm
Max part size	200 x 80 x 100 cm



Copper

Copper displays excellent thermal conductivity, electrical conductivity and plasticity. It is also highly ductile, corrosion resistant and can be easily welded.


Copper	
Wall Thickness	0.75 mm
Lead Time	3 days
Tolerances	±0.01mm
Max part size	200 x 80 x 100 cm



Brass

Brass is valued for various applications due to its low friction, superior electrical conductivity, and distinctive golden appearance.

Brass	
Wall Thickness	0.75 mm
Lead Time	3 days
Tolerances	±0.01mm
Max part size	200 x 80 x 100 cm



Stainless Steel

Stainless steel is a low carbon steel that possesses numerous properties desirable for industrial applications. It generally contains at least 10% chromium by weight.

Stainless Steel	
Machinable Material Types	304 SS, 303 SS, 316 SS, SS 430F, 301 SS etc.
Lead Time	3 days
Tolerances	±0.01mm
Max part size	200 x 80 x 100 cm



Titanium

Titanium has a number of material properties that make it the ideal metal for demanding applications. These properties include excellent resistance to corrosion, chemicals and extreme temperatures. The metal also has an excellent strength-to-weight ratio.

Titanium	
Wall Thickness	0.75 mm
Lead Time	3 days
Tolerances	±0.01mm
Max part size	200 x 80 x 100 cm



Plastics

Plastics are also a very popular option for CNC machining because of its wide choices, relatively lower price, and significantly faster machining time needed. We provide all common plastics for CNC machining

Plastics	
Machinable Material Types	Buff ABS, Black ABS, Clear ABS, 94V0 flame retarding ABS, ABS+PC, Black Polycarbonate, Transparent Polycarbonate, Acrylic, NYLON 6, NYLON 66, PA6+30%GF, HDPE, POM, PP, PP+20%GF, PE, TEFLON, PPS, PEEK, PPO, PPE, PEI
Lead Time	3 days

	services.	Tolerances	±0.01mm
		Max part size	200 x 80 x 100 cm

Inspections and Review for Every Stage of Production

To ensure quality from start to finish, Barana Rapid provides the following inspection and review services:

Extensive incoming materials verification

Design for manufacturing reviews for all quotes provided


Contract reviews upon receipt of POs

First article and in-process inspections

Final inspections and testing with reports and certifications as required

Our First Article Inspection Process				
Upon receiving your order requirements, Barana Rapid will conduct a first article inspection service. In line with our company's policies, we offer this service to enhance the execution of your machining project when the order value meets or exceeds 3,000 US dollars, or the minimum order quantity is 300 pieces.				
	Step 1	Step 2	Step 3	Step 4
Barana Rapid	Offer first article inspection We offer first article inspection services for batch production.	Draft contract We review the project and contact customers for detailed information.	Produce sample We produce sample parts according to the FAI agreement and deliver them to you.	Full-scale production The full-scale production starts and finishes production within lead time.
Client	Request inspection You request first article inspection for a project that meets our FAI requirements.	Sign contract You sign the FAI agreement provided by us and agree on our Terms and Conditions.	Receive sample You receive and examine the parts, inform us of full-scale production may begin.	Receive products You receive your prototypes or production parts on the required lead time.

Quality Inspection

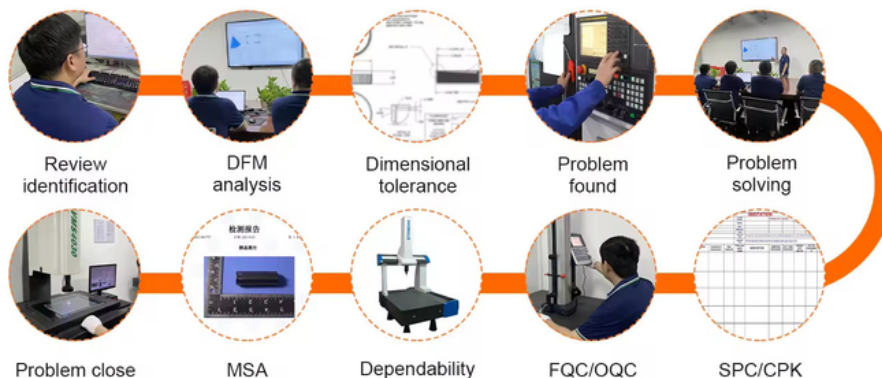

Packing





BETTER PROTOTYPE

Baranarm Technology Limited



86 137 2889 6282



baranarm@baranarm.com



cncmachining-prototype.com

RM502 Block B Floor 5th LiTong Semiconductor industrial park ShaPuWei Community SongGang Street Baoan
District Shenzhen, Guangdong, China, ZipCode 518105